AnywhereUSB®

Network-Enabled USB Hub

AnywhereUSB is a network-enabled USB hub that connects peripheral devices anywhere on a Local Area Network – without a locally-attached host PC.

Overview

AnywhereUSB hubs, featuring patented USB Over IP® technology, make it easy to connect two to five USB devices anywhere on a wired or wireless network – without locally attached host PCs. The AnywhereUSB TS model also adds up to four RS-232 serial ports, enabling the mixing of USB and serial ports on the same network connection.

AnywhereUSB software drivers are loaded onto a host PC or server so that remote devices may communicate with the host, without changing existing application software. Drivers work equally well in physical servers or virtual machines in virtualized environments. Peripheral devices can be centrally managed and monitored from a remote server or PC via an IP address.

Relocating the host PC to a remote location translates to smaller workstations, enabling deployment without a local PC in kiosks, ATMs, restaurant kitchens, manufacturing lines or any hostile or non-secure area where having a local PC is not practical.

Application Highlight

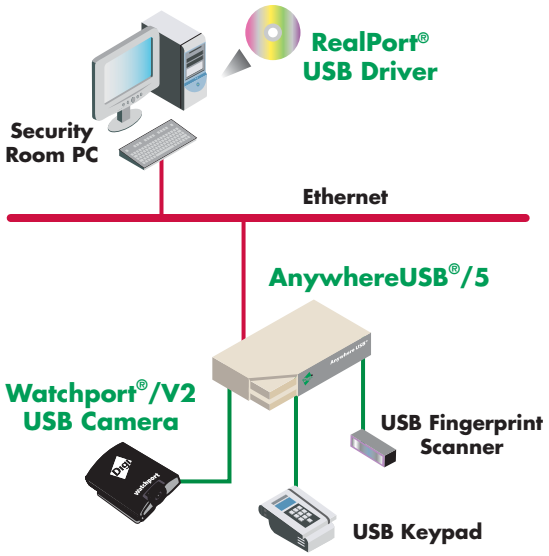

Features/Benefits

- Network-enabled USB hub easily connects any USB device to a LAN
- Ideal for connecting USB and serial devices over the network in virtualized environments such as VMware
- Creates systems redundancy and increases security since host PC can be moved to a remote location
- Access and monitor USB and serial devices over a TCP/IP connection
- Simplifies operations and reduces IT support
- Compatible with bulk or interrupt type USB devices

Related Products

Watchport® Camera

Watchport® Sensors


Edgeport® Family

Specifications	AnywhereUSB®/2	AnywhereUSB®/5	AnywhereUSB® TS
Interfaces			
10/100Base-T Ethernet	1 RJ-45		
USB	2	5	4
Serial	–	–	4 RS-232 RJ-45
Features			
IP Address	1 static (fixed) address per unit		
LEDs	System and Device status		
Power Supply	Ships with 120/230VAC 60/50 Hz at 5VDC @ 3 Amps max		
Other Shared Features	Remote configuration utility; Multiple units supported per server; Field-upgradable software and firmware; Patented RealPort (serial over IP) and RealPort USB (USB over IP); RJ-45 crossover cable		
Serial Data Rates	–	–	Up to 230 Kbps per port
USB Downstream Power	500 mA per USB device		
USB Compatibility	USB 1.0, 1.1, 2.0 (USB 2.0 devices will operate at 1.1 speed)		
Operating Systems	Windows Vista®, Windows Server® 2008, Windows Server 2003, Windows® XP, Windows XP Embedded		
Dimensions (L x W x H)	2.38 in x 3.9 in x x 1.0 in (6.04 cm x 10.0 cm x 2.54 cm)	4.35 in x 7.20 in x 1.03 in (11.05 cm x 18.29 cm 2.61 cm)	
Weight	5.0 oz (141.8 g)	10.0 oz (283.5 g)	
Environmental			
Operating Temperature	32° F to 140° F (0° C to 60° C)		
Storage Temperature	-40° F to +185° F (-40° C to +85° C)		
Relative Humidity	0% to 95% (non-condensing)		
Network and Device Recommendations			
Network Type	100 Mb switched Ethernet per AnywhereUSB		
USB Device Types	Compatible with bulk or interrupt type USB devices; Isochronous devices not supported		
Regulatory Approvals			
Safety	UL 1950/CSA 2.2 No. 950, EN60950, IEC-950		
Emissions/Immunity	CE, FCC Part 15 (Class B), EN55022, EN55024		

AnywhereUSB/5 - Front

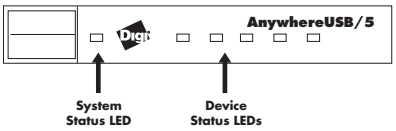

AnywhereUSB/2 - Front



AnywhereUSB TS - Front

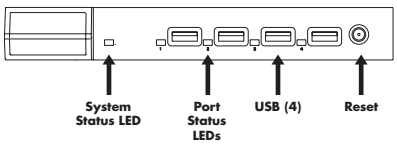

AnywhereUSB/5 - Back

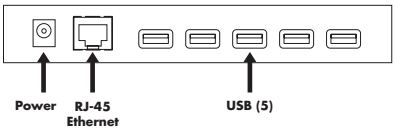

AnywhereUSB/2 - Back



AnywhereUSB TS - Back

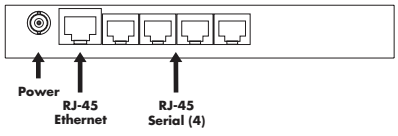

Visit www.digi.com for part numbers.

DIGI SERVICE AND SUPPORT - You can purchase with confidence knowing that Digi is here to support you with expert technical support and a strong five-year warranty. www.digi.com/support

91001219
D4/110

Digi International
877-912-3444
952-912-3444
info@digi.com

Digi International France
+33-1-55-61-98-98
www.digi.fr

Digi International KK
+81-3-5428-0261
www.digi-intl.co.jp

Digi International (HK) Limited
+852-2833-1008
www.digi.cn

BUY ONLINE • www.digi.com

© 1999-2010 Digi International Inc.
All rights reserved. Digi, Digi International, the Digi logo, AnywhereUSB, RealPort and USB Over IP are trademarks or registered trademarks of Digi International Inc. in the United States and other countries worldwide. All other trademarks are the property of their respective owners.